

# Grit Guy Technical Specifications

## suction system

Model No.	Reclaim	Dust Collector	Electrical Req.	Est. Ship wt
4024-S	None	Cartridge	14A 110v 1ph	350 lbs.
4024-S/DH	300 CFM	9 Bags	14A 110/220v 1ph	530 lbs.
4824-S	None	Cartridge	14A 110v 1ph	380 lbs.
4824-S/DH	300 CFM	9 Bags	14A 110/220v 1ph	580 lbs.

### *Cabinet construction*

14 gauge fabrication with seam welds for added strength. Deep sump angle insures superior media flow

### *Working chamber*

Dimensions. 48"W 24"D 25"H  
Dual walled doors will not warp.  
Safety door latch  
Positive door seals.  
Full access doors swing wide.



### *View window*

12" x 20" window  
Replaceable mylar protects window.

### *Lighting*

Soft, cool, non glare fluorescent light reduces operator fatigue and increases productivity. Light located outside and on top of the cabinet.

### *Blast Gun*

Ergonomically designed, offers a comfortable pistol grip. Balanced to reduce wrist fatigue. Four combinations are available for small jobs or to increase production.

### *Gloves*


Comfortable, soft, lined, full length gloves seal to the cabinet.

### *Hoses*

Light weight, flexible and abrasive resistant.

### Floor Space Required

(both S and DH)

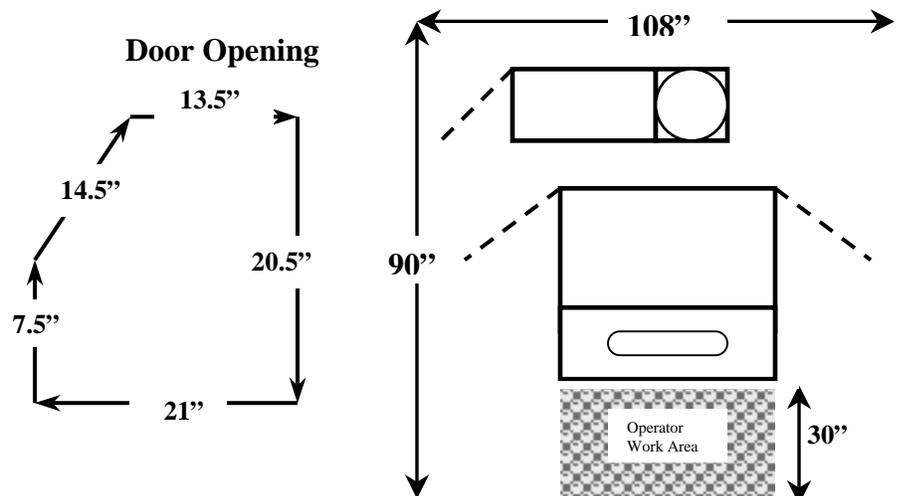

Air Requirements (CFM)	Gun #	40 PSI	60 PSI	80 PSI
1/4" nozzle, 1/8" Orifice	4	12	17	21
5/16" nozzle, 5/32" Orifice	5	19	27	34
3/8" nozzle, 3/16" Orifice	6	27	37	47
7/16" nozzle, 7/32" Orifice	7	38	52	66