

EM-PRO Air Operated Spotwelders

25 KVA, 35 KVA & 50 KVA Capacity

FEATURES:

- 25 KVA Capacity: 2 pcs 16GA Galvanized
- 35 KVA Capacity: 2 pcs 12GA Galvanized
- 50 KVA Capacity: 2 pcs 10GA Galvanized
- Electric Foot Pedal Control
- 24" & 30" Arms available (Quoted Separately)
- Upper and lower arms use 1" OD barrel tip holders at 90° and or 45°
- Use standard #1 or #2 Morse 2 spotwelder tips (RWMA #4 or #5)
- Water Cooled Transformer, Arms, Tip Holders
- Safety Thermostats
- Air Regulator with Moisture Trap
- Digital Microprocessor Welding Control with SCR
- Electrics: 220V/440V/575V 1PH
- Dimensions (L x W x H): 40" x 12" x 50"

**1 YEAR
FACTORY PARTS
WARRANTY**

**** NOW AVAILABLE ****

OPTIONAL SELF CONTAINED CHILLER
No need to connect to water supply!
(Can be retrofitted to any spotwelder)



PX1600 plus Control

Digital touch pad controls: squeeze time, power ramp, weld time, weld power, pulse welding and auto repeat (Option for 2nd Foot pedal available) Allows for precise weld control adjustment for perfect welds and increased tip life.

Choose 24" or 30" Arms



Lower Arm Fitted to Accept 3" & Larger Diameter Tubes

Option #4


Water Cooled Transformer, Arms and Tip Holder for Consistent Weld Quality and Longer Tip Life

Adjustable Height on Lower Arm

Air Regulator with Moisture Trap

Electric Foot Pedal Control

---Tip Holder Configuration Options---

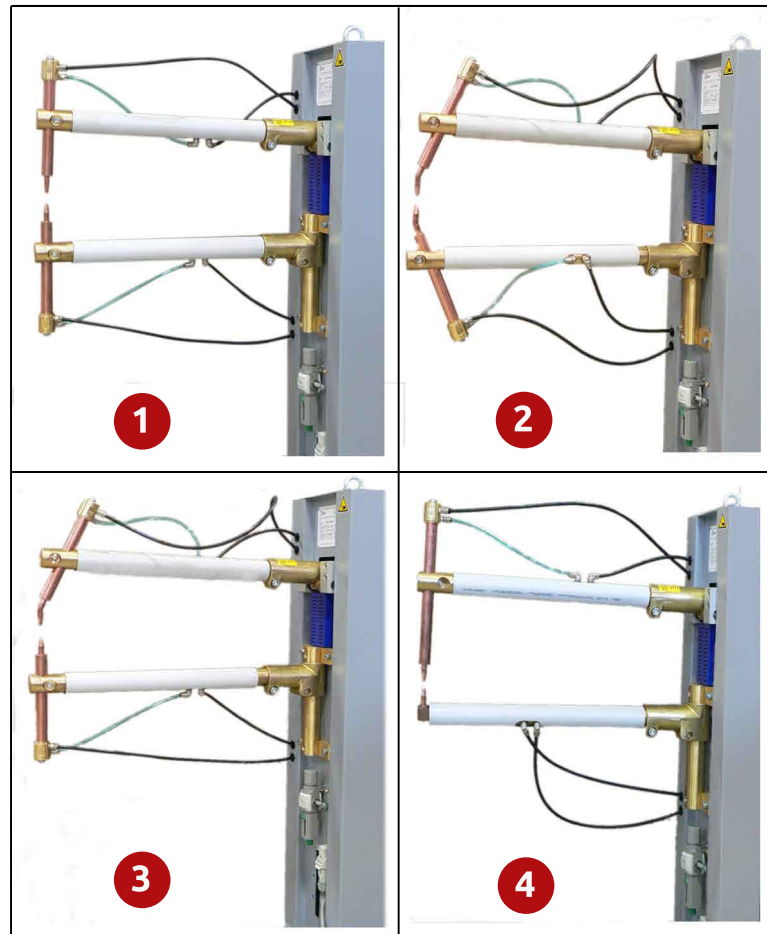

Phone: 916-638-7718 Fax: 916-638-2450

www.scottmachinery.com

4700 Lang Ave, Suite D, McClellan, CA 95652